




EXTDRIVE T8 G2 UL TYPE C LED T8 TUBE + EXTERNAL DRIVER



dimmable external driver

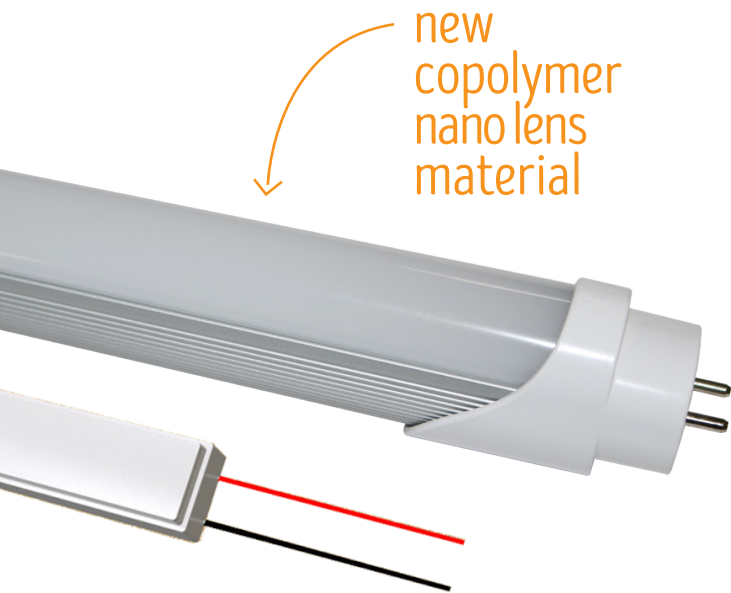

- New high performance nano lens material.
- Flicker-free LED driver.
- One driver for 1, 2, 3 or 4 LED tubes.
- Patented fully diffused lens cover for uniform, glare free illumination.
- High on the DLC list with industry leading LPW.
- Reduce energy usage up to 70%



RemPhos by **Light Efficient Design**
lighting on target

FOR LIGHT EFFICIENT DESIGN PRODUCT INFO CALL Light Efficient Design • 188 S. Northwest Highway • Cary, IL 60013 • 847.380.3540 • led-llc.com
FOR REMPHOS PRODUCT INFO CALL RemPhos by Light Efficient Design • 30 Log Bridge Road, Building 200 • Middleton, MA 01949 • 877.997.3674 • remphos.com

10.30.18 Information is subject to change without notice.

EXTDRIVE T8 G2 UL TYPE C LED T8 TUBE + EXTERNAL DRIVER



ORDERING GUIDE

TOTAL SYSTEM WATTAGE/ LUMEN OUTPUT	LED BAR LENGTH	# OF BARS PER DRIVER	SYSTEM (KIT) PART # TO ORDER	WATTAGE PER LED BAR	LUMENS PER LED TUBE	COLOR	DLC	
10W/1300LM	2FT	1	RPT-B-EXTDRIVE-T8-G2-10W-2FT-1L-8XX	10	1300	35/40/50		
		2	RPT-B-EXTDRIVE-T8-G2-10W-2FT-2L-8XX	5	650	35/40/50		
		3	RPT-B-EXTDRIVE-T8-G2-10W-2FT-3L-8XX	3.3	433	35/40/50		
		4	RPT-B-EXTDRIVE-T8-G2-10W-2FT-4L-8XX	2.5	325	35/40/50		
	3FT	1	RPT-B-EXTDRIVE-T8-G2-10W-3FT-1L-8XX	10	1300	35/40/50		
		2	RPT-B-EXTDRIVE-T8-G2-10W-3FT-2L-8XX	5	650	35/40/50		
		3	RPT-B-EXTDRIVE-T8-G2-10W-3FT-3L-8XX	3.3	433	35/40/50		
		4	RPT-B-EXTDRIVE-T8-G2-10W-3FT-4L-8XX	2.5	325	35/40/50		
	4FT	1	RPT-B-EXTDRIVE-T8-G2-10W-4FT-1L-8XX	10	1300	35/40/50	•	
		2	RPT-B-EXTDRIVE-T8-G2-10W-4FT-2L-8XX	5	650	35/40/50		
		3	RPT-B-EXTDRIVE-T8-G2-10W-4FT-3L-8XX	3.3	433	35/40/50		
		4	RPT-B-EXTDRIVE-T8-G2-10W-4FT-4L-8XX	2.5	325	35/40/50		
15W/1950LM	2FT	2	RPT-B-EXTDRIVE-T8-G2-15W-2FT-2L-8XX	7.5	975	35/40/50		
		3	RPT-B-EXTDRIVE-T8-G2-15W-2FT-3L-8XX	5	650	35/40/50		
		4	RPT-B-EXTDRIVE-T8-G2-15W-2FT-4L-8XX	3.75	488	35/40/50		
		2	RPT-B-EXTDRIVE-T8-G2-15W-3FT-2L-8XX	7.5	975	35/40/50		
	3FT	3	RPT-B-EXTDRIVE-T8-G2-15W-3FT-3L-8XX	5	650	35/40/50		
		4	RPT-B-EXTDRIVE-T8-G2-15W-3FT-4L-8XX	3.75	488	35/40/50		
		1	RPT-B-EXTDRIVE-T8-G2-15W-4FT-1L-8XX	15	1950	35/40/50		
		2	RPT-B-EXTDRIVE-T8-G2-15W-4FT-2L-8XX	7.5	975	35/40/50		
	4FT	3	RPT-B-EXTDRIVE-T8-G2-15W-4FT-3L-8XX	5	650	35/40/50		
		4	RPT-B-EXTDRIVE-T8-G2-15W-4FT-4L-8XX	3.75	488	35/40/50		
		2	RPT-B-EXTDRIVE-T8-G2-20W-2FT-2L-8XX	10	1300	35/40/50	•	
		3	RPT-B-EXTDRIVE-T8-G2-20W-2FT-3L-8XX	6.7	867	35/40/50		
20W/2600LM	2FT	4	RPT-B-EXTDRIVE-T8-G2-20W-2FT-4L-8XX	5	650	35/40/50		
		2	RPT-B-EXTDRIVE-T8-G2-20W-3FT-2L-8XX	10	1300	35/40/50		
		3	RPT-B-EXTDRIVE-T8-G2-20W-3FT-3L-8XX	6.7	867	35/40/50		
		4	RPT-B-EXTDRIVE-T8-G2-20W-3FT-4L-8XX	5	650	35/40/50		
	3FT	2	RPT-B-EXTDRIVE-T8-G2-20W-4FT-2L-8XX	10	1300	35/40/50	•	
		3	RPT-B-EXTDRIVE-T8-G2-20W-4FT-3L-8XX	6.7	867	35/40/50		
		4	RPT-B-EXTDRIVE-T8-G2-20W-4FT-4L-8XX	5	650	35/40/50		
		3	RPT-B-EXTDRIVE-T8-G2-30W-2FT-3L-8XX	10	1300	35/40/50	•	
	30W/3900LM	2FT	4	RPT-B-EXTDRIVE-T8-G2-30W-2FT-4L-8XX	7.5	975	35/40/50	
			3	RPT-B-EXTDRIVE-T8-G2-30W-3FT-3L-8XX	10	1300	35/40/50	
			4	RPT-B-EXTDRIVE-T8-G2-30W-3FT-4L-8XX	7.5	975	35/40/50	
			2	RPT-B-EXTDRIVE-T8-G2-30W-4FT-2L-8XX	15	1300	35/40/50	•
3FT		3	RPT-B-EXTDRIVE-T8-G2-30W-4FT-3L-8XX	10	1950	35/40/50		
		4	RPT-B-EXTDRIVE-T8-G2-30W-4FT-4L-8XX	7.5	975	35/40/50		
		4	RPT-B-EXTDRIVE-T8-G2-36W-2FT-4L-8XX	9	1170	35/40/50		
		4	RPT-B-EXTDRIVE-T8-G2-36W-3FT-4L-8XX	9	1170	35/40/50		
36W/4680LM		2FT	3	RPT-B-EXTDRIVE-T8-G2-36W-4FT-3L-8XX	12	1560	35/40/50	•
			4	RPT-B-EXTDRIVE-T8-G2-36W-4FT-4L-8XX	9	1170	35/40/50	
			4	RPT-B-EXTDRIVE-T8-G2-36W-2FT-4L-8XX	10	1300	35/40/50	
			4	RPT-B-EXTDRIVE-T8-G2-36W-3FT-4L-8XX	10	1300	35/40/50	
	3FT	3	RPT-B-EXTDRIVE-T8-G2-36W-4FT-3L-8XX	13.3	1733	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-36W-4FT-4L-8XX	10	1300	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
	40W/5200LM	2FT	4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•
			4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•
			4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•
			4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•
3FT		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
4FT		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
60W/7800LM	2FT	4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
	3FT	4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
	4FT	4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	
		4	RPT-B-EXTDRIVE-T8-G2-60W-4FT-4L-8XX	15	1950	35/40/50	•	



FOR LIGHT EFFICIENT DESIGN PRODUCT INFO CALL Light Efficient Design • 188 S. Northwest Highway • Cary, IL 60013 • 847.380.3540 • led-llc.com
 FOR REMPHOS PRODUCT INFO CALL RemPhos by Light Efficient Design • 30 Log Bridge Road, Building 200 • Middleton, MA 01949 • 877.997.3674 • remphos.com


10.30.18 Information is subject to change without notice.

EXTDRIVE T8 G2

UL TYPE C LED T8 TUBE + EXTERNAL DRIVER




LED LAMP DIMENSIONS

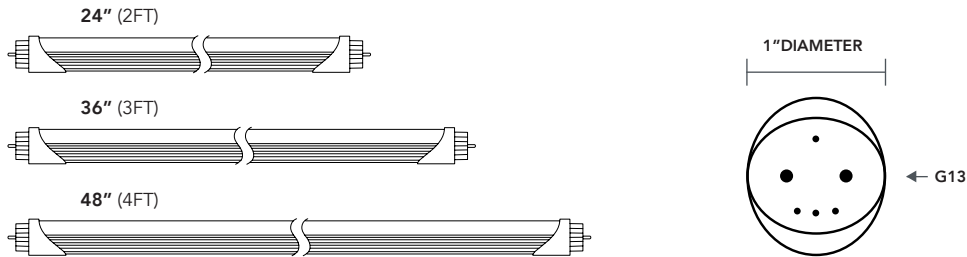


LED DRIVER DIMENSIONS


10-30 WATT DRIVER



40-60 WATT DRIVER



80 WATT DRIVER

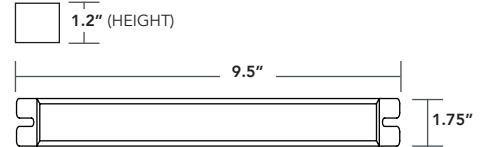

RemPhos by Light Efficient Design
lighting on target

FOR LIGHT EFFICIENT DESIGN PRODUCT INFO CALL Light Efficient Design • 188 S. Northwest Highway • Cary, IL 60013 • 847.380.3540 • led-llc.com
FOR REMPHOS PRODUCT INFO CALL RemPhos by Light Efficient Design • 30 Log Bridge Road, Building 200 • Middleton, MA 01949 • 877.997.3674 • remphos.com

10.30.18 Information is subject to change without notice.