



An elegant LED linear strip fixture with a luminous efficacy of over 135 LPW. This fixture can be either ceiling or wall mounted and is equipped with a 0-10V compatible dimming driver. The superior luminous efficacy makes it an ideal replacement for T8 and T5 fluorescent fixtures.

PROJECT NAME

PARTNUMBER

## PART NUMBER BUILDER


MANUFACTURER	MODEL NUMBER	LENGTH	LUMINOUS FLUX	CRI/CCT	GEN
RPT	LIVH	48IN 96IN	50L 80L	840 850	G1

## ORDERING EXAMPLE

RPT-LIVH-48IN-50L-850-G1



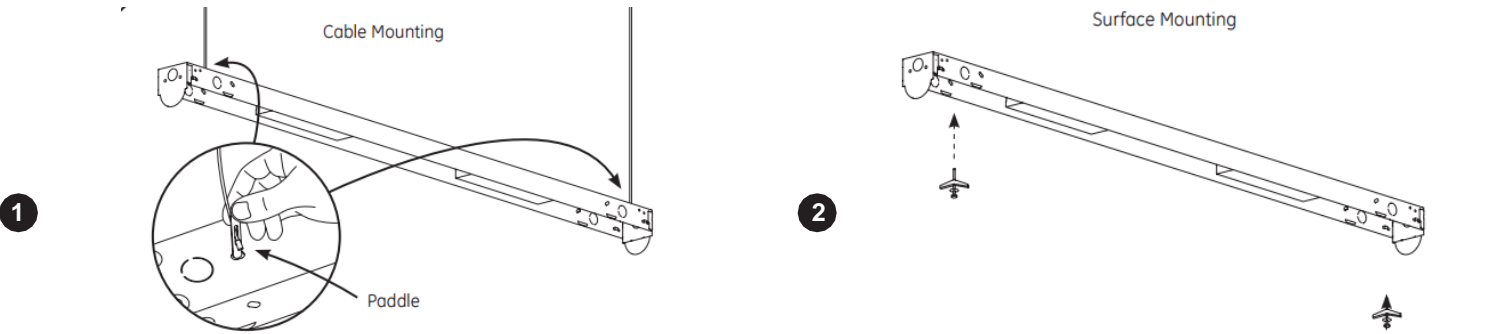

\*Custom order


## INSTALLATION GUIDE



Simplified instructions. Reference full installation guide for more details. Only qualified personnel should perform installation.

## QUICK SPECS

INPUT VOLTAGE	120-277VAC
EFFICACY	135 lumens/watt
OPERATING TEMP	-25°C to 45°C
MAX CASE TEMP	50°C
POWER FACTOR/THD	>0.9 Power Factor, THD<20%
CRI	80+
BEAM ANGLE SPREAD	120°
RATED LIFE	L70 LED Lifetime >100,000 hrs
WARRANTY	5 years
CERTIFICATIONS	  
PERFORMANCE LISTINGS	

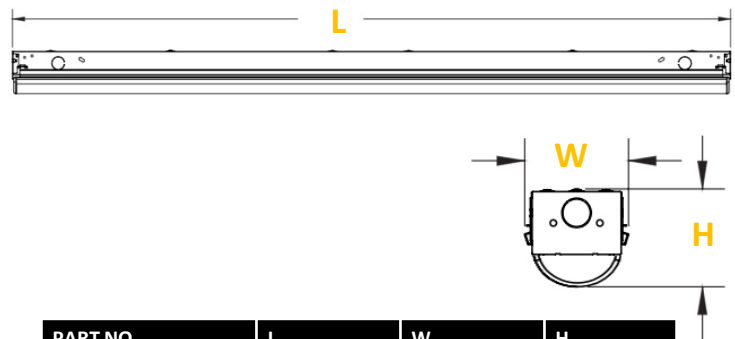

PART NO	L	W	H
RPT-LIVH-48IN	48"	3.35"	3.56"
RPT-LIVH-96IN	96"	3.35"	3.56"

## ORDERING GUIDE

DLC	PART#	LUMEN OUTPUT(LM)	INPUT WATTS (W)	TRADITIONAL EQUIVALNT	WARRANTY (YRS)
▲	RPT-LIVH-48IN-50L-840-G1	5390	40	2 x 39 T5 FL	5
▲	RPT-LIVH-48IN-50L-850-G1	5400	40	2 x 39 T5 FL	5
▲	RPT-LIVH-96IN-80L-840-G1	8280	60	2 x 54 T5 FL	5
▲	RPT-LIVH-96IN-80L-850-G1	8400	60	2 x 54 T5 FL	5

▲ =DLC premium



Printed on paper that is FSC<sup>®</sup> Certified, SF<sup>®</sup> Certified Sourcing and Rainforest Alliance Certified™.  
10% post consumer recycled content and certified fiber, it's the optimal environmental choice, because RemPhos cares.