

LED PANEL G3 LED FLAT PANEL FIXTURE | FLEXWATT + FLEXCOLOR + FLEXCONTROL

- PRO
- BASE
- SUPPLY
- CUSTOM

HOW TO EASILY CHANGE THE WATTAGE AND COLOR TEMPERATURE OF THIS FIXTURE



HOW DOES IT WORK?

We custom designed our own optimized LED driver in-house so that the driver operates at maximum efficiency at each wattage. Our competitors standard, off-the-shelf LED drivers would have reduced efficiency at different wattages.


WHAT ARE THE WATTAGE CHOICES?

The 2x2, 1x4 & 2x4 fixtures all have different wattage/lumen offerings. Please reference this table and the ordering guide on the last page of the cut sheet.

FLEXWATT TURN DIAL POSITION				
SIZE	0	1	2	3
2X2	16W (20L)	20W (25L)	24W (31L)	28W (36L)
1X4	16W (20L)	20W (25L)	24W (31L)	28W (36L)
2X4	20W (25L)	24W (31L)	28W (36L)	40W (53L)

HOW EASY IS IT TO SET?

Simply open the fixture, and adjust the 4-position turn dial with a small, flat-head screw driver. Takes 30 seconds max. Can be "locked-out" to prevent field-adjustability if desired.

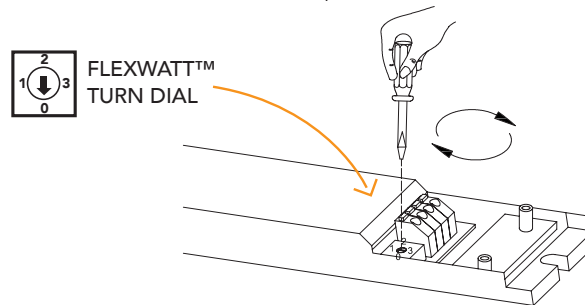

HOW DOES IT WORK?

We select the highest efficacy, multiple color LED diodes from quality suppliers, and mount them on the same circuit board. A proprietary LED binning process ensures color consistency between fixtures. The FlexColor technology controller ensures the correct color is selected, every time.


WHAT ARE THE COLOR CHOICES?

The 2x2, 1x4 & 2x4 fixtures all have the same 3 choices for color temperature. 3500k, 4000k and 5000k. Please reference this table and the ordering guide on the last page of the cut sheet.

FLEXCOLOR SLIDE SWITCH POSITION			
SIZE	TOP	MIDDLE	BOTTOM
2X2	3500K	4000K	5000K
1X4	3500K	4000K	5000K
2X4	3500K	4000K	5000K

HOW EASY IS IT TO SET?

Simply open the fixture, and adjust the 3-position slide switch with your fingers. Takes 30 seconds max. Can be "locked-out" to prevent field-adjustability if desired.

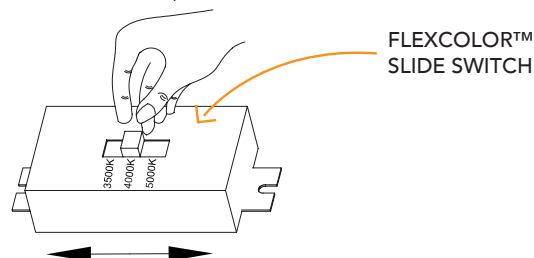

11.20.17 Information is subject to change without notice.

RemPhos • 877.997.3674 • www.remphos.com
30 Log Bridge Road • Building 200 • Middleton, MA 01949 • USA

RemPhos
lighting on target